

## DESCRIPTION

The lamp has an aluminum white trim and a PC lens, which supports surface installation. This flush mount panel light is designed for comfortable illumination in office, home, hotels, corridors, shopping malls, schools.

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.



## FEATURES

- Emits evenly, without halo and shadow
- Fit 2.75"/3.5" J-Box
- Ultra-thin design

## STYLISH AND SLIM DESIGN

This ultra bright LED Flush Mount is only 0.98 inch thickness.

The smooth surface is suitable for a variety of decorative styles.

## DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

## ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

## SPECIFICATION

- Model: 11FMCT24SR05WH
- Size: 11inch
- Wattage: 24W
- Lumens:  
1740lm/1825lm/1998lm/2090lm/2001lm
- Voltage: 120V
- Power Frequency: 60Hz
- Power Factor: >0.9
- 5CCT: 2700K/3000K/3500K/4000K/5000K
- CRI: 90
- Beam Angle: 120°
- Material: AL+PS
- Lifespan: ≥50,000hours
- Operating Temp: (-4°F~ 113°F) -20~45°C
- Dimmable: Triac Dimming
- Rating: Suitable for DampLocations
- Warranty: 5 year limited

## ENERGY SAVINGS

80% more energy savings than halogen lamps.

## LISTING

ETL Listed.

**Product View**



EASILY FLIP THE SWITCH FOR DESIRED CCT



**PRODUCTS VIEW**



**DIMENSION**

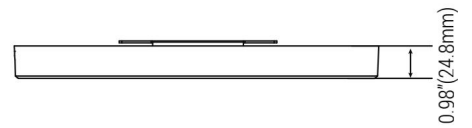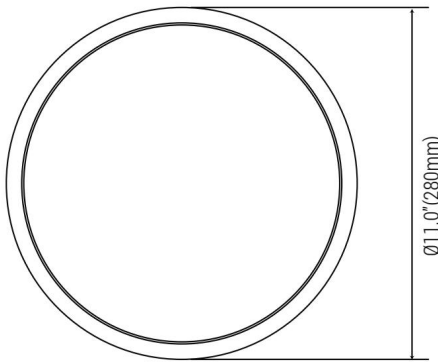

**RECOMMENDED DIMMER**

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	RNL06	6672	PD-6WCL MACL-153M//MA-R
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M	6674	
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	IPL06	DSL06	

**INSTALLATION ACCESSORIES**



Mounting Bracket



Screws



Wire Nuts