


## DESCRIPTION

5CCT Gimbal Recessed Downlight can be tilt adjusted  $\pm 20^\circ$  from the horizontal position. It also has a  $38^\circ$  light beam and a precision lens. This means it delivers uniform brightness without scattering or glare. Ideal for directing light to speciEc areas such as buildings, walls and artwork. Widely used in narrow ceilings, kitchens, bars, living room, bedroom, bathroom, hallway, hotel, office, library and many other places, where you need a bright light.

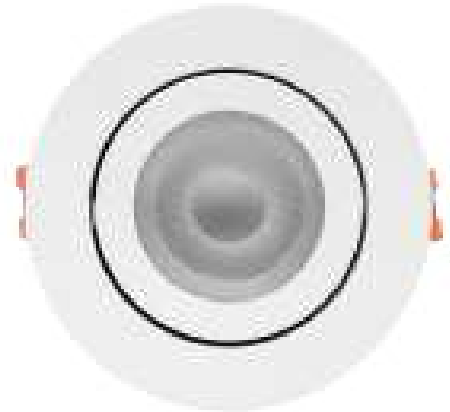

## FEATURES

- Fully enclosed aluminum housing
- Spring loaded retention arms allow for easy installation into ceilings up to 1" thick with no need for a recessed housing
- TIR optic provides smooth, uniform light with a  $38^\circ$  beam angle

## INSTALLATION

No existing recessed housing or junction box required.

Suitable for most new constructions.

Install J-Box in ceiling beam, and insert light right into drywall opening.

## DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

## ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

## SPECIFICATION

- Model: 3EJCT06GRWHE
- Size: 3inch
- Wattage: 6W
- Lumens: 342lm/396lm/420lm/429lm/415lm
- Voltage: 120V
- Power Frequency: 60Hz
- Power Factor:  $>0.9$
- 5CCT: 2700K/3000K/3500K/4000K/5000K
- CRI: 80/90
- Beam Angle:  $38^\circ$
- Material: AL+PC
- Lifespan:  $\geq 50,000$ hours
- Operating Temp: ( $-4^\circ\text{F} \sim 113^\circ\text{F}$ )  $-20 \sim 45^\circ\text{C}$
- Dimmable: Triac Dimming
- Rating: Suitable for Wet Locations
- Warranty: 5 year limited

## ENERGY SAVINGS

80% more energy savings than halogen lamps.


## LISTING

ETL Listed.




## Product View

Easily flip the switch for desired CCT

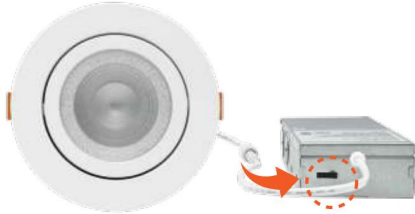

Beam Angle 38°





Can be tilt adjusted ±20° from the horizontal position.



## DIMENSION

Size	A	B	C	D	E	F
3inch	Ø3.7"(95mm)	1.18"(30mm)	1.55"(39.4mm)	3.94"(100mm)	2.68"(68mm)	1.34"(34mm)
4inch	Ø5.0"(128mm)	1.38"(35mm)	1.50"(38.1mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)

Size	Hole Size
3inch	3 5/64"(78mm)
4inch	4 21/64"(110mm)

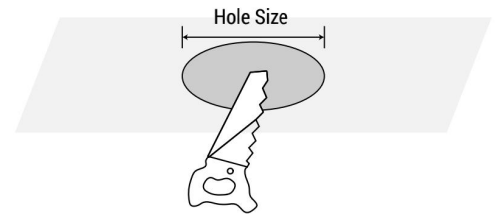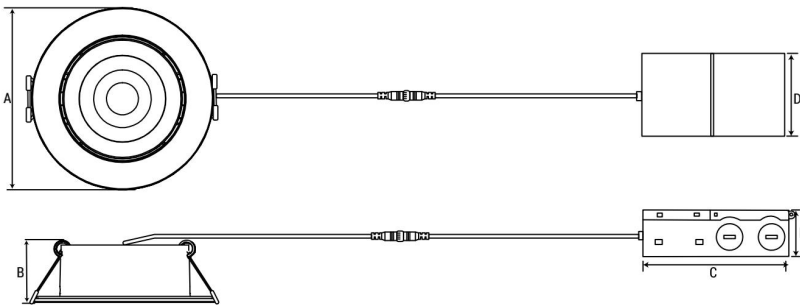

## RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	RNL06	6672	PD-6WCL MACL-153M//MA-R
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M	6674	
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	IPL06	DSL06	

### ACCESSORIES

PART	DESCRIPTION	QUANTITY
A	J-Box driver	1
B	Connector	3
C	Hole cutout card	1

