

## DESCRIPTION

This fixture has an integrated junction box, making installation quick and easy. Design with a baffle trim.

Color: 2700K-5000K.

Wet-location rated, ideal for retail lighting, commercial lighting, residential lighting, office lighting, kitchen lighting, bathroom lighting, basement lighting.



## FEATURES

- Retrofits in existing incandescent can housing
- Suitable for Wet Locations
- IC rated for safe contact with insulation
- 90+ CRI, superior color rendering performance

## INSTALLATION

No existing recessed housing or junction box required.

Suitable for most new constructions.

Simply connect the junction box wiring on the back of the recessed downlight to your light switch and place it into your ceiling.

## DIMMING

Compatible with most triac dimmers to give user a smooth 100%-5% dimming to choose the desired brightness.

## ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

## SPECIFICATION

- Model: 4BJ10XXLRWH
- Size: 4inch
- Wattage: 10W
- Lumens: 589lm/606lm/674lm/621lm
- Voltage: 120V
- Power Frequency: 60Hz
- Power Factor: >0.9/0.7
- 5CCT: 2700K or 3000K or 4000K or 5000K
- CRI: 90
- Beam Angle: 100°
- Material: PC+AL
- Lifespan: ≥50,000hours
- Operating Temp: (-4°F~ 113°F) -20~45°C
- Dimmable: Triac Dimming
- Rating: Suitable for Wet Locations
- Warranty: 5 year limited

## ENERGY SAVINGS

80% more energy savings than halogen lamps.

## LISTING



ETL Listed. Energy Star.



**Product View**




**SIZE & DIMENSION**

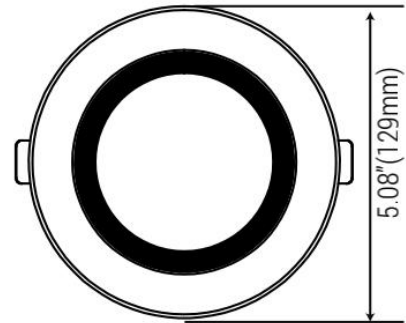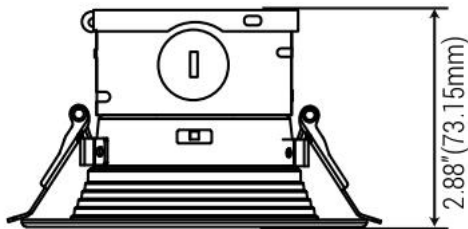

**RECOMMENDED DIMMER**

LUTRON				LEVITON	
TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	RNL06 MSCL-OP153M IPL06	6672 6674 DSL06	PD-6WCL MACL-153M//MA-R


**HOLE SIZE & ACCESSORIES**

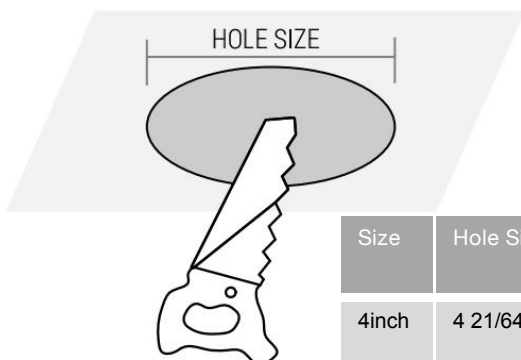

Size	Hole Size
4inch	4 21/64" (110mm)



Wire nuts



Hole cutout card