

DESCRIPTION

Aluminum reflector with architectural white %nish. Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Wet-location rated, ideal for hotels, corridors, home decoration, shopping malls, schools.

Available size: 4", 6"



FEATURES

- · Emits evenly, without halo or shadows
- Continuous dimming from 100% to 10% with many Triac Dimmers
- No need housing

INSTALLATION

No existing recessed housing or junction box required.

Suitable for most new constructions.

Install J-Box in ceiling beam, and insert light right into drywall opening.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ETL Listed. Energy Star. Title24.

LISTING

SPECIFICATION

- Model: 4EJCT10LR05
- Size: 4inch
- Wattage: 10W
- Lumens:704Lm/754Lm/806Lm/799Lm/728 Lm
- Voltage: 120V
- Power Frequency: 60Hz
- Power Factor: >0.9
- 5CCT: 2700K/3000K/3500K/4000K/5000K
- CRI: 90
- Beam Angle: 100°
- Material: PS+AL
- Lifespan: ≥50,000hours
- Operating Temp: (-4°F~ 113°F) -20~45°C
- Dimmable: Triac dimming
- Rating: Suitable for Wet Locations
- Warranty: 5 year limited

ENERGY SAVINGS

80% more energy savings than halogen lamps.






Product View


4inch & 6inch: Easily flip the switch for desired CCT



SIZE & DIMENSION & HOLE SIZE

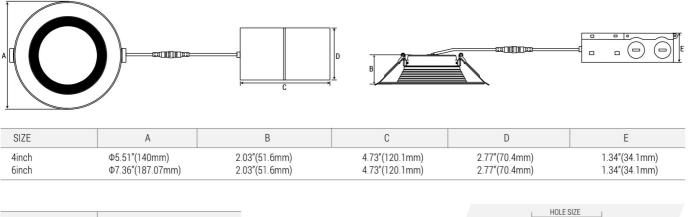

SIZE	HOLE SIZE
4inch	4 21/64"(110mm)
6inch	6 19/64"(160mm)



RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	RNL06 MSCL-OP153M IPL06	6672 6674 DSL06	PD-6WCL MACL-153M//MA-R

