


## DESCRIPTION

A flexible downlight solution supports surface mounting and retrofit installation . High quality Iron shell with frosted PC diffuser. Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms.

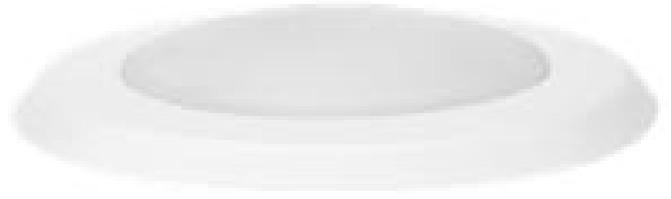

## FEATURES

- Low profile, no flicker
- Continuous dimming from 100% to 5% with many Triac Dimmers
- Provide true color rendering with 90+ CRI

## INSTALLATION

With multiple apertures, can be installed into any 4 inch recessed can, or any 2.75 inch junction box.

## DIMMING

Compatible with most triac dimmers to give user a smooth 100%-5% dimming to choose the desired brightness.

## ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

## SPECIFICATION

- Model: 4HVCT10D5WH
- Size: 4inch
- Wattage: 10W
- Lumens: 540lm/591lm/614lm/617lm/586lm
- Voltage: 120V
- Power Frequency: 60Hz
- Power Factor: >0.9
- 5CCT: 2700K/3000K/3500K/4000K/5000K
- CRI: 90
- Beam Angle: 120°
- Material: PC+Iron
- Lifespan: ≥50,000hours
- Operating Temp: (-4°F~ 122°F) -20~40°C
- Dimmable: Triac Dimming
- Rating: Suitable for Wet Locations
- Warranty: 5 year limited

## ENERGY SAVINGS

80% more energy savings than halogen lamps.


## LISTING

ETL Listed.



**Product View**



FLIP THE SWITCH TO CHOOSE DESIRED CCT

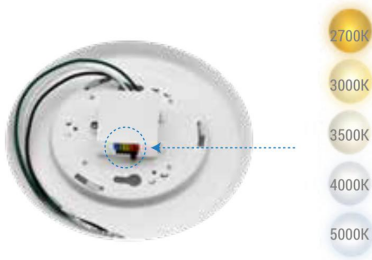

PRODUCT VIEW



**DIMENSION**

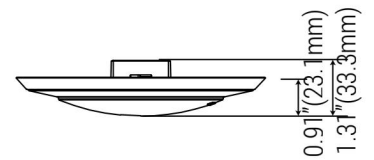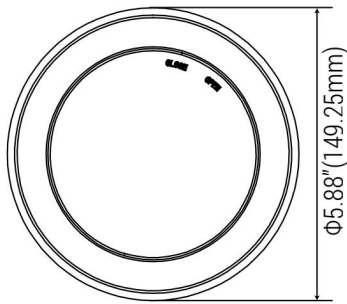

**RECOMMENDED DIMMER**

LUTRON				LEVITON	
TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	RNL06 MSCL-OP153M IPL06	6672 6674 DSL06	PD-6WCL MACL-153M//MA-R



**a**



**b**



**c**



**d**



**e**

**SURFACE MOUNT ACCESSORIES**

**RETROFIT ACCESSORIES**

PART	DESCRIPTION	QUANTITY
c	Wire Nuts	3
d	Screw 1	2

PART	DESCRIPTION	QUANTITY
a	E26 Adapter	1
b	Clips	3
c	Wire Nuts	3
e	Screw 2	3