

DESCRIPTION

This commercial grade recessed downlight is 15 in 1,available in 3 wattages and 5 CCT tunable. 120-277V input voltage, 0-10V dimming.

Wet-location and IC rated, ideal use for commercial complexes, hospitality, healthcare industry, schools, shopping centers, industrial areas and hotels.

Available size: 6", 8", 10"



FEATURES

- High luminous efficacy, up to 100LM/W
- High quality Aluminium shell with frosted PC diffuser
- Deep smooth trim design, make sure light more perfect, no glare

INSTALLATION

Easy fit installation – Spring-action housing clips. Suitable for most new constructions.

DIMMING

Supports 0-10V dimming from 100% to 10%.

ELECTRICAL

This fixture is built with the highest quality drivers, ensuring energy efficiency.

SPECIFICATION

- Model: 6CMCT19HR05
- Size: 6inch
- Wattage: 10W-14W-19W
- Lumens: 1052lm-1474lm-1985lm
- Voltage: 120-277V
- Power Frequency: 50/60Hz
- 5CCT: 2700K/3000K/3500K/4000K/5000K
- CRI: 90
- Beam Angle: 90°
- Material: AL+PC
- Lifespan: ≥50,000hours
- Operating Temp: (-4°F~ 122°F) -20~40°C
- Dimmable: 0-10V dimming
- Rating: Suitable for Wet Locations
- Warranty: 5 year limited

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed. FCC.















Product View

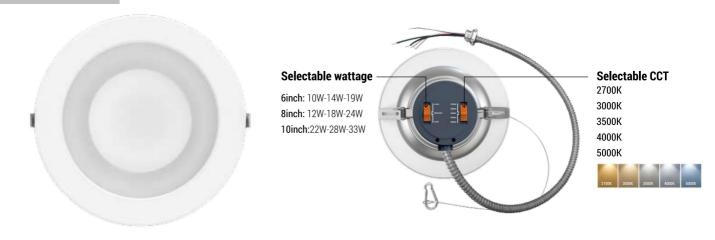


LIGHTING SCHEMATIC








ACCESSORIES






Wire nuts

DIMENSION

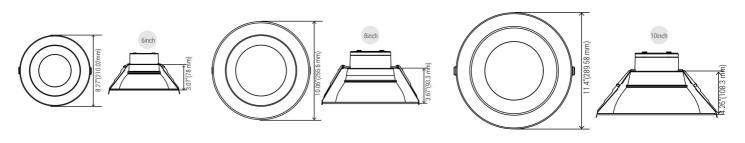

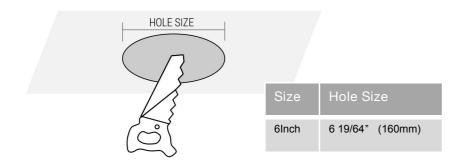

RECOMMENDED DIMMER	
LUTRON	LEGRAND
RMJS-8T-DV-B Diva DVSTV MS-Z101-WH DVSTV-WH	RH4FBL3PW