

DESCRIPTION

A flexible downlight solution supports surface mounting and retrofit installation. High quality Iron shell with frosted PC diffuser. Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms.



FEATURES

- Low profile, no flicker
- Continuous dimming from 100% to 5% with many Triac Dimmers
- Provide true color rendering with 90+ CRI

INSTALLATION

With multiple apertures, can be installed into any 5 or 6 inch recessed can, or any 3.5 inch junction box.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-5% dimming to choose the desired brightness.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

SPECIFICATION

- Model: 6HVCT15D5WH
- Size: 6inch
- Wattage: 15W
- Lumens: 923lm/970lm/1098lm/1126lm/1023lm
- Voltage: 120V
- Power Frequency: 60Hz
- Power Factor: >0.9
- 5CCT: 2700K/3000K/3500K/4000K/5000K
- CRI: 90
- Beam Angle: 120°
- Material: PC+Iron
- Lifespan: ≥50,000hours
- Operating Temp: (-4°F~ 122°F) -20~40°C
- Dimmable: Triac Dimming
- Rating: Suitable for Wet Locations
- Warranty: 5 year limited

ENERGY SAVINGS

80% more energy savings than halogen lamps.


LISTING

ETL Listed. Energy Star.



Product View



FLIP THE SWITCH TO CHOOSE DESIRED CCT

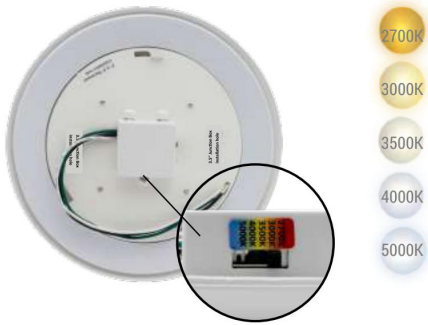

PRODUCT VIEW



DIMENSION

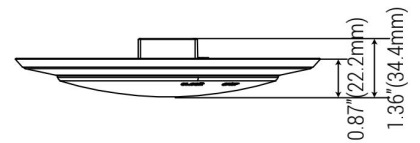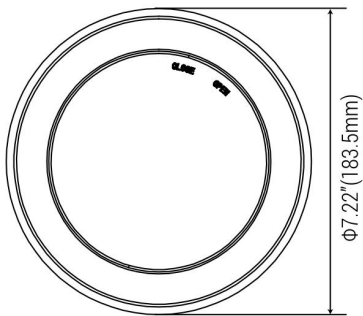


RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	RNL06 MSCL-OP153M IPL06	6672 6674 DSL06	PD-6WCL MACL-153M//MA-R



a



b



c



d

SURFACE MOUNT ACCESSORIES

PART	DESCRIPTION	QUANTITY
c	Wire Nuts	3
d	Screws	2

RETROFIT ACCESSORIES

PART	DESCRIPTION	QUANTITY
a	E26 Adapter	1
b	Mounting Springs	2
c	Wire Nuts	3