

## DESCRIPTION

Ultra -thin design, lamp thickness only 0.82 ". The die casting surface ring, excellent heat dissipation. Fixture design has infrared sensor interface; Options: conventional lighting and PIR sensors; 5 adjustable color temperature.

It is suitable for office, family, hotels, corridors, shopping centers, schools, books and other places.



## FEATURES

- Emits evenly, without halo and shadow
- Fit 2.75 or 3.5 inch J-Box
- Support surface mount
- Die-cast trim

## STYLISH AND SLIM DESIGN

This ultra bright LED Flush Mount is only 0.82 inch thickness.

The smooth surface is suitable for a variety of decorative styles.

## DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

## ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

## SPECIFICATION

- Model: 7FMCT15SR05WH
- Size: 7inch
- Wattage: 15W
- Lumens: 1062lm/1165lm/1273lm/1282lm/1181lm
- Voltage: 120V
- Power Frequency: 60Hz
- Power Factor: >0.9
- 5CCT: 2700K/3000K/3500K/4000K/5000K
- CRI: 90
- Beam Angle: 120°
- Material: die casting AL+PS
- Lifespan: ≥50,000hours
- Operating Temp: (-4°F~ 113°F) -20~45°C
- Dimmable: Triac Dimming
- Rating: Suitable for Wet Locations
- Warranty: 5 year limited

## ENERGY SAVINGS

80% more energy savings than halogen lamps.

## LISTING


ETL Listed. Title24.





**PS diffuser**

High light transmission, 120° beam Angle, 6.4" diameter luminous surface, soft light.

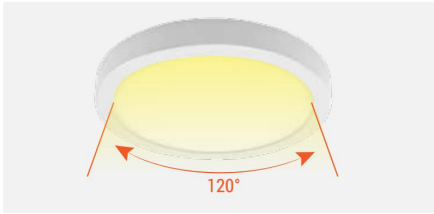


**Die-cast trim**

Precision casting, excellent heat dissipation, high corrosion; lamp thickness only 0.82".




**Color temperature optional**

2700K-5000K

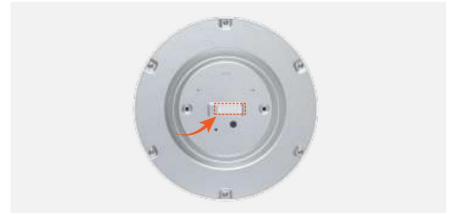

**Mounting bracket**

With multiple apertures, can be installed into any 2.75 or 3.5inch junction box.

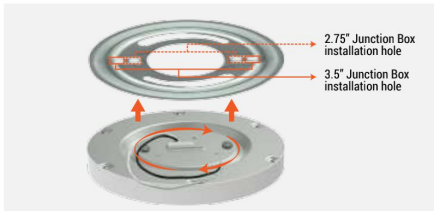


**PIR sensor**

External PIR sensor optional



**Safety rope**



Installation is more convenient and safer.

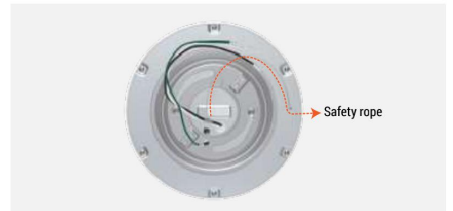

**RECOMMENDED DIMMER**

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	RNL06	6672	PD-6WCL MACL-153M//MA-R
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M	6674	
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	IPL06	DSL06	

**DIMENSION**



**ACCESSORIES**



Wire Nuts



Screws

Specification subject to change without notice