

#### **DESCRIPTION**

PC driver housing and Aluminum reflector with architectural white finish. Easy clip-in to existing can housing. Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K. Damp-location rated, ideal for residential housings, hotels, corridors, home decoration, shopping malls, schools.

Available size: 4", 6"



#### **FEATURES**

- Emits evenly, without halo or shadows.
- Continuous dimming from 100% to 5% with many Triac Dimmers
- Baffle/Smooth finish option
- Color removable trim available (sold separately): Brushed nickel, Black, Bronze. Baffle/Smooth trim option.

### **INSTALLATION**

Fit in 4, 5/6 inch compatible housing cans directly, no additional accessories are required.

## **DIMMING**

Compatible with most triac dimmers to give user a smooth 100%-5% dimming to choose the desired brightness.

## **ELECTRICAL**

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

#### **SPECIFICATION**

- Model: 4HVCT10HRWH
- Size: 4inchWattage: 10W
- Lumens: 670lm/707lm/736lm/752lm/744lm
- Voltage: 120V
- Power Frequency: 60Hz
- Power Factor: >0.9
- 5CCT: 2700K/3000K/3500K/4000K/5000K
- CRI: 90
- Beam Angle: 100°Material: PC+AL
- Material. FCTAL
- Lifespan: ≥50,000hours
- Operating Temp: (-4°F~ 113°F) -20~45°C
- Dimmable: Triac Dimming
- Rating: Suitable for Damp Locations
- Warranty: 5 year limited

## **ENERGY SAVINGS**

80% more energy savings than halogen lamps.

## **LISTING**

ETL Listed. Title24.
















# **Product View**

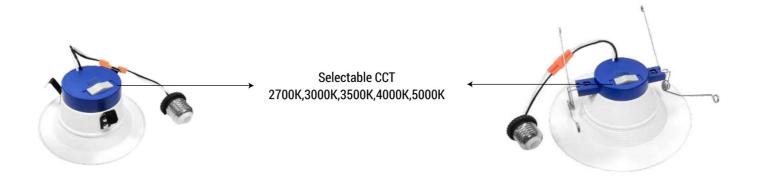







# RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	RNL06 MSCL-OP153M IPL06	6672 6674 DSL06	PD-6WCL MACL-153M//MA-R

#### REMOVABLE TRIM(SOLD SEPARATELY)











Brushed nickel

Black

Bronze

E26 Adapter