

#### **DESCRIPTION**

PC driver housing and Aluminum reflector with architectural white finish. Easy clip-in to existing can housing. Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K. 3 levels of adjustable wattage. Damp-location rated, ideal for residential housings, hotels, corridors, home decoration, shopping malls, schools.

Available size: 4", 6"



#### **FEATURES**

- Emits evenly, without halo or shadows.
- Continuous dimming from 100% to 5% with many Triac Dimmers
- Baffle/Smooth finish option
- Color removable trim available (sold separately): Brushed nickel, Black, Bronze. Baffle/Smooth trim option.

#### **INSTALLATION**

Fit in 4, 5/6 inch compatible housing cans directly, no additional accessories are required.

## **DIMMING**

Compatible with most triac dimmers to give user a smooth 100%-5% dimming to choose the desired brightness.

### **ELECTRICAL**

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

#### **SPECIFICATION**

Model: 4HVCTLR05WH12W

Size: 4inchWattage: 12W

Lumens: 847lm/925lm/903lm/827lm/801lm

Voltage: 120V

Power Frequency: 60Hz

Power Factor: >0.9

5CCT: 2700K/3000K/3500K/4000K/5000K

CRI: 90

Beam Angle: 100°Material: PS+AL

Lifespan: ≥50,000hours

Operating Temp: (-4°F~ 113°F) -20~45°C

Dimmable: Triac Dimming

Rating: Suitable for Damp Locations

Warranty: 5 year limited

### **ENERGY SAVINGS**

80% more energy savings than halogen lamps.

### **LISTING**

ETL Listed. Title24.














## **Product View**

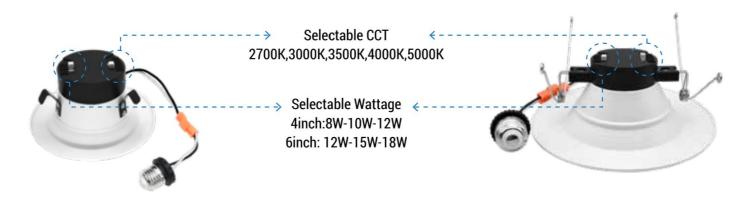

# **DIMENSION**





## RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	RNL06 MSCL-OP153M IPL06	6672 6674 DSL06	PD-6WCL MACL-153M//MA-R

#### **ACCESSORIES**

#### REMOVABLE TRIM(SOLD SEPARATELY)



E26 Adapter



Brushed nickel



Black



Bronze