

## DESCRIPTION

Ultra slim design, lamp thickness only 1.22". Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K. IC rated for direct contact with insulation.

Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms.

Available size: 4", 6"



## FEATURES

- Baffle trim design
- Edge-lit technology, with no glare or dark spots
- Continuous dimming from 100% to 10% with many Triac Dimmers
- Instant on
- No flicker

## INSTALLATION

No existing recessed housing or junction box required.

Suitable for most new constructions.

Install J-Box in ceiling beam, and insert light right into drywall opening.

## DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

## ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

## LISTING

ETL Listed.

## SPECIFICATION

- Model: 6EJCT12SR05-B
- Size: 6inch
- Wattage: 12W
- Lumens:957Lm/990Lm/999Lm/1010Lm/952Lm
- Voltage: 120V
- Power Frequency: 60Hz
- Power Factor: >0.9
- 5CCT: 2700K/3000K/3500K/4000K/5000K
- CRI: 90
- Beam Angle: 100°
- Material: PS+AL
- Lifespan: ≥50,000hours
- Operating Temp: (-4°F~ 113°F) -20~45°C
- Dimmable: Triac dimming
- Rating: Suitable for Wet Locations
- Warranty: 5 year limited

## ENERGY SAVINGS

80% more energy savings than halogen lamps.




## Product View

**4inch & 6inch:** Easily flip the switch for desired CCT

Products view




## SIZE & DIMENSION & HOLE SIZE

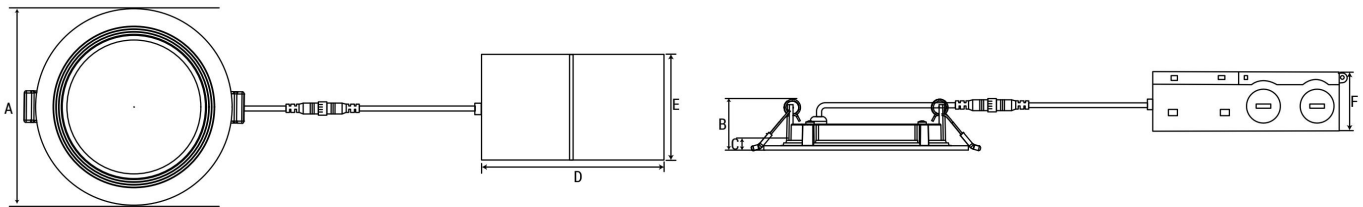

SIZE	A	B	C	D	E	F
4inch	Φ4.92"(125mm)	1.22"(31.1mm)	0.37"(9.3mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)
6inch	Φ6.89"(175mm)	1.22"(31.1mm)	0.37"(9.3mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)

SIZE	HOLE SIZE)
4inch	4 21/64"(110mm)
6inch	6 19/64"(160mm)

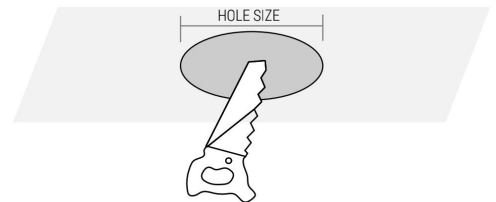

## RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	RNL06	6672	PD-6WCL MACL-153M//MA-R
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M	6674	
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	IPL06	DSL06	

## ACCESSORIES

PART	DESCRIPTION	QUANTITY
A	J-Box driver	1
B	Connector	3
C	Hole cutout card	1

